





877.260.7888 www.southwestgreens.com



GB-113 SWFR (Bolt)

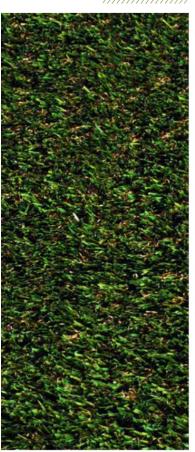

| | Property | Imperial Unit | Metric Unit | Description |
|---------------------------|-------------------------|--|-------------------------|---|
| PRODUCT PROPERTIES | Fiber Type | | | 100% Polyethylene |
| | Fiber Mass | 10800 denier 4500 denier | 12000 dtex 5000 dtex | 6 Ply PE Mono 8 Ply TXT Thatch |
| | Finished Pile Height | 1.5 in | 38.10 mm | · |
| | Color(s) | (302) Olive Blend/ Green-Green Thatch (301) Fresh Green/ Green-Green Thatch | | (304) Olive Blend/ Green-Green Thatch (303) Fresh Green/ Green-Jute Thatch |
| | Tufting Gauge | 1/4 in | | |
| | Primary Backing | 7 oz/yd ² | 237 g/m ² | Stabilized Dual Layered Woven Polypropylene |
| | Secondary Backing | 22 oz/yd ² | 746 g/m ² | Urethane |
| PERFORMANCE PROPERTIES | Tufted Face Weight | 58 oz/yd² | 1966 g/m ² | ATSM D418 |
| | Total Weight | 87 oz/yd² | 2950 g/m ² | ATSM D418 |
| PACKAGING | Item Number | | | GB-113 |
| | Roll Width | 15 ft | 4.57 m | |

Southwest Greens international warrants to the original purchaser of the turf that for fifteen (15) years from the date of synthetic turf installation, the turf, when installed and maintained as recommended by the yarn and turf manufacturer, will retain at least 50% of its pile fiber. If any area or portion of the turf substantially changes, as distinguished from a change in texture, or if pile heights decrease 50% or within ten years after its initial installation, Southwest Greens international will have all such areas or portions replaced with or wrut of equivalent quality, excluding installation costs. Southwest Greens International also warrants that at the time of the initial turf installation, the synthetic turf will be free of manufacturing defects. Slight color changes will occur over the lifetime of this turf/carpet and is not considered an issue or basis for claim. All labor cost involved with the removal of the affected turf/carpet and reinstallation of the replacement will be the responsibility of the purchaser.

*For full terms, please see the 15 year warranty agreement.

^{*} Tufted pile height as standard. Pile height will draw down slightly during secondary backing process.
** Tufting gauge and strich rate as manufactured standard. Values will change slightly during secondary backing process.
** Standard roll lengths. Roll lengths may vary. Custom roll lengths and outs are available upon request.
****All specifications subject to manufacturing tolerances of 4/-596.