




301 BLEND
305 FRESH GREEN

GB-042

BOLT 80

Bolt technology simply means you have the best in aesthetics and durability. Performance grade fibers are constructed with better spring back and reduced sheen for natural looking lawn turf. Wear testing has proven twice the resilience as a typical yarn—delivering the most durable fibers for lawn applications is a true revolution in the marketplace.



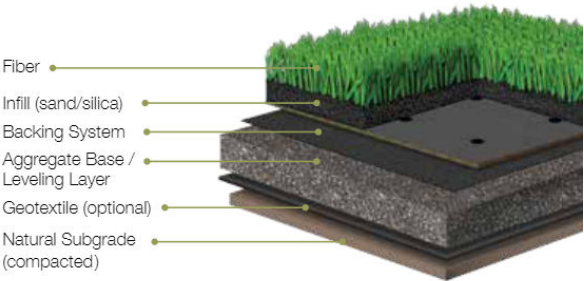

GB-042

BOLT 80



	Property	Imperial Unit	Metric Unit	Description
PRODUCT PROPERTIES	Fiber Type			100% Polyethylene
	Fiber Mass	10800 denier	1200 dtex	6 Ply PE Bolt Mono
		4500 denier	5000 dtex	8 Ply TXT Thatch
	Finished Pile Height	2 in	50.8 mm	
	Color(s)			(301) Blend- (305) Fresh Green- with Green-Brown Thatch
	Tufting Gauge	1/4 in		
PERFORMANCE PROPERTIES	Primary Backing	7 oz/yd ²	237 g/m ²	Stabilized Dual Layered Woven Polypropylene
	Secondary Backing	20 oz/yd ²	678 g/m ²	Urethane
	Tufted Face Weight	80 oz/yd ²	2713 g/m ²	ATSM D418
	Total Weight	107 oz/yd ²	3627 g/m ²	ATSM D418
PACKAGING	Item Number			GB-042
	Roll Width	15 ft	4.57 m	

15 YEAR WARRANTY
Southwest Greens International warrants to the original purchaser of the turf that for fifteen (15) years from the date of synthetic turf installation, the turf, when installed and maintained as recommended by the yarn and turf manufacturer, will retain at least 50% of its pile fiber. If any area or portion of the turf substantially changes, as distinguished from a change in texture, or if pile heights decrease 50% or more within ten years after its initial installation, Southwest Greens International will have all such areas or portions replaced with new turf of equivalent quality, excluding installation costs. Southwest Greens International also warrants that at the time of the initial turf installation, the synthetic turf will be free of manufacturing defects. Slight color changes will occur over the lifetime of this turf/carpet and is not considered an issue or basis for claim. All labor cost involved with the removal of the affected turf/ carpet and reinstallation of the replacement will be the responsibility of the purchaser.

*For full terms, please see the 15 year warranty agreement.

* Tufted pile height as standard. Pile height will draw down slightly during secondary backing process.
** Tufting gauge and stitch rate as manufactured standard. Values will change slightly during secondary backing process.
*** Standard roll lengths. Roll lengths may vary. Custom roll lengths and cuts are available upon request.
**** All specifications subject to manufacturing tolerances of +/-5%.