



Fiber -Infill (sand/silica) • Backing System • Shock Pad (optional) 877.260.7888 www.southwestgreens.com Aggregate Base / Leveling Layer Geotextile (optional) Natural Subgrade • (compacted)






	Property	Imperial Unit	Metric Unit	Description
PRODUCT PROPERTIES	Fiber Type			100% Polyethylene
	Fiber Mass	10800 denier 4500 denier	12000 dtex 5000 dtex	6 Ply PE Mono 8 Ply TXT Thatch
	Finished Pile Height	1.125 in	28.58 mm	
	Color(s)			Olive Blend/ Dual Green Thatch
	Tufting Gauge	1/4 in		
	Primary Backing	7 oz/yd ²	237 g/m ²	Stabilized Dual Layered Woven Polypropylene
	Secondary Backing	20 oz/yd ²	678 g/m ²	Urethane
PERFORMANCE PROPERTIES	Tufted Face Weight	68 oz/yd²	2306 g/m ²	ATSM D418
	Total Weight	92 oz/yd ²	3119 g/m ²	ATSM D418
PACKAGING	Item Number			GB-085
	Roll Width	15 ft	4.57 m	
	<u> </u>			<u> </u>

Southwest Greens international warrants to the original purchaser of the turf that for fifteent (15) years from the date of synthetic turf installation, the turf, when installed and maintained as recommended by the yarn and turf manufacturer, will retain at least 50% of its pile fiber. If any area or portion of the turf substantially changes, as distinguished from a change in texture, or if pile heights decrease 50% or more within ten years after its initial installation, Southwest Greens international will have all such areas or portions replaced with new turf of equivalent quality, excluding installation costs. Southwest Greens international allow awrants that at the time of the initial turf installation, the synthetic turf will be free of manufacturing defects. Sight color changes will occur over the lifetime of this turf/carpet and is not considered an issue or basis for claim. All labor cost involved with the removal of the affected turf/ carpet and reinstallation of the replacement will be the responsibility of the purchaser.

*For full terms, please see the 15 year warranty agreement.

- * Tufted pile height as standard. Pile height will draw down slightly during secondary backing process.
 ** Tuffing gauge and strich rate as manufactured standard. Values will change slightly during secondary backing process.
 *** Standard roll lengths. Roll lengths may vary. Custom roll lengths and cuts are available upon request.
 **** All specifications subject to manufacturing tolerances of 4/5%.

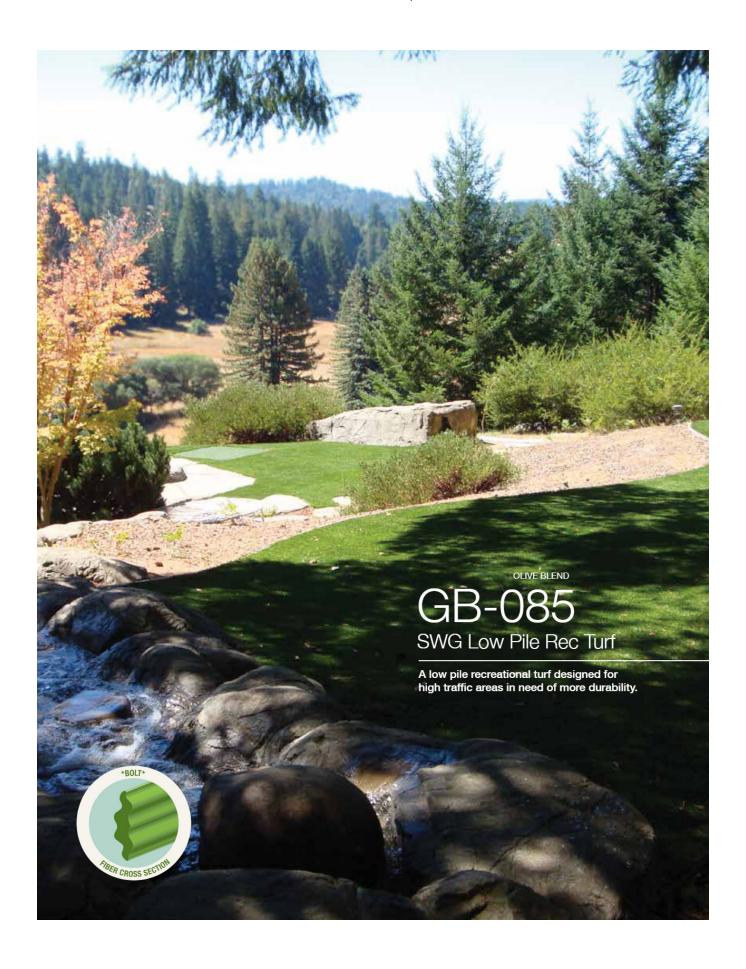



www.southwestgreens.com

Fiber -Infill (sand/silica) • Backing System • Shock Pad (optional) Aggregate Base / Leveling Layer Geotextile (optional) Natural Subgrade • (compacted)



SWG Low Pile Rec Turf



	Property	Imperial Unit	Metric Unit	Description
PRODUCT PROPERTIES	Fiber Type			100% Polyethylene
	Fiber Mass	10800 denier 4500 denier	12000 dtex 5000 dtex	6 Ply PE Mono 8 Ply TXT Thatch
	Finished Pile Height	1.125 in	28.58 mm	
	Color(s)			Olive Blend/ Dual Green Thatch
	Tufting Gauge	1/4 in		
	Primary Backing	7 oz/yd²	237 g/m ²	Stabilized Dual Layered Woven Polypropylene
	Secondary Backing	20 oz/yd ²	678 g/m ²	Urethane
PERFORMANCE PROPERTIES	Tufted Face Weight	68 oz/yd²	2306 g/m ²	ATSM D418
	Total Weight	92 oz/yd²	3119 g/m ²	ATSM D418
PACKAGING	Item Number			GB-085
	Roll Width	15 ft	4.57 m	Control of Control

Southwest Greens international warrants to the original purchaser of the turf that for fifteent (15) years from the date of synthetic turf installation, the turf, when installed and maintained as recommended by the yarn and turf manufacturer, will retain at least 50% of its pile fiber. If any area or portion of the turf substantially changes, as distinguished from a change in texture, or if pile heights decrease 50% or more within ten years after its initial installation, Southwest Greens international will have all such areas or portions replaced with new turf of equivalent quality, excluding installation costs. Southwest Greens international allow awrants that at the time of the initial turf installation, the synthetic turf will be free of manufacturing defects. Sight color changes will occur over the lifetime of this turf/carpet and is not considered an issue or basis for claim. All labor cost involved with the removal of the affected turf/ carpet and reinstallation of the replacement will be the responsibility of the purchaser.

*For full terms, please see the 15 year warranty agreement.

- * Tufted pile height as standard. Pile height will draw down slightly during secondary backing process.
 ** Tuffing gauge and strich rate as manufactured standard. Values will change slightly during secondary backing process.
 *** Standard roll lengths. Roll lengths may vary. Custom roll lengths and cuts are available upon request.
 **** All specifications subject to manufacturing tolerances of 4/5%.