



300 SPRING GREEN

GB-134


SWG BOLT 63

Built with the highest grade performance fibers this product provides maximum durability with practicality. Designed for high traffic locations the Bolt series has twice the wear rating as other landscape styles. The conservative pile height blends great looks with easy care.





877.260.7888
www.southwestgreens.com

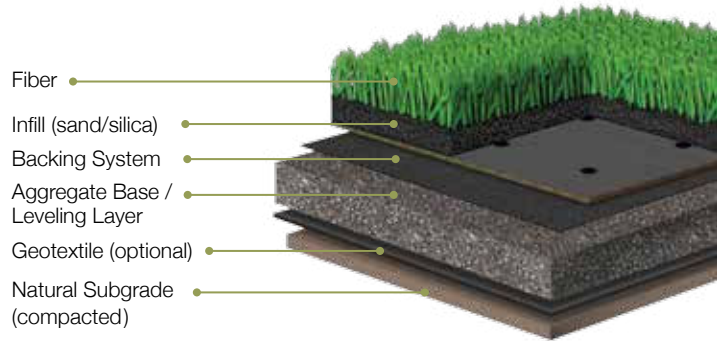

GB-134

SWG BOLT 63



	Property	Imperial Unit	Metric Unit	Description
PRODUCT PROPERTIES	Fiber Type			100% Polyethylene
	Fiber Mass	10800 denier	1200 dtex	Ply 409
		4500 denier	5000 dtex	8 Ply TXT Thatch
	Finished Pile Height	1.625 in	41.275 mm	
	Color(s)			(300) Spring Green with with Green-Jute Thatch
	Tufting Gauge	1/4 in		
	Primary Backing	7 oz/yd ²	237 g/m ²	Stabilized Woven Polypropylene
	Secondary Backing	20 oz/yd ²	678 g/m ²	Urethane
PERFORMANCE PROPERTIES	Tufted Face Weight	63 oz/yd ²	2136 g/m ²	ATSM D418
	Total Weight	90 oz/yd ²	3051 g/m ²	ATSM D418
PACKAGING	Item Number			GB-134
	Roll Width	15 ft	4.57 m	

15 YEAR WARRANTY

Southwest Greens International warrants to the original purchaser of the turf that for fifteen (15) years from the date of synthetic turf installation, the turf, when installed and maintained as recommended by the yarn and turf manufacturer, will retain at least 50% of its pile fiber. If any area or portion of the turf substantially changes, as distinguished from a change in texture, or if pile heights decrease 50% or more within ten years after its initial installation, Southwest Greens International will have all such areas or portions replaced with new turf of equivalent quality, excluding installation costs. Southwest Greens International also warrants that at the time of the initial turf installation, the synthetic turf will be free of manufacturing defects. Slight color changes will occur over the lifetime of this turf/carpet and is not considered an issue or basis for claim. All labor cost involved with the removal of the affected turf/carpet and reinstallation of the replacement will be the responsibility of the purchaser.

*For full terms, please see the 15 year warranty agreement.

* Tufted pile height as standard. Pile height will draw down slightly during secondary backing process.

** Tufting gauge and stitch rate as manufactured standard. Values will change slightly during secondary backing process.

*** Standard roll lengths. Roll lengths may vary. Custom roll lengths and cuts are available upon request.

**** All specifications subject to manufacturing tolerances of +/-5%.